


DEMANDING ENVIRONMENTS

TAILOR-MADE

STRENGTH

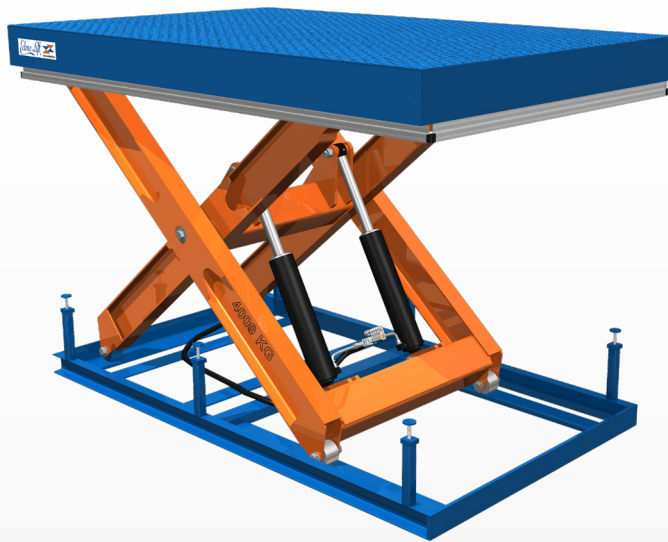

LIFT SOLUTIONS CAN BE FOUND AT EDMOLIFT

EdmoLift's Lorry Loader is developed to be used on loading platforms for the loading and unloading of vehicles. The Lorry Loader evens out the difference in level between the vehicle and the permanent loading platform. The Lorry Loader is designed and equipped to handle the great stresses that result when lorries and other vehicles pass over it. The standard model of Lorry Loader is equipped with: 8 mm tear plate platform, Mechanical stops in the base frame

Reinforcement in the lift table which allows for a wheel pressure of 2 metric tons driving over it while in the closed position. Reinforcement that can withstand up to 5 metric tons of wheel pressure is available. The lift tables are available in different colours, with a range of different accessories or control units – all tailored to the needs and requirements of the customer. Even more functionality can be achieved with the addition of various accessories. A few examples of these are the remote hydraulic unit, upper limit position, loading flap, self-supporting base frame, rollback stop, inspection cover, guard rails and gates

For further information, see our product leaflet "Accessories".

With a variety of designs and models, load capacity of between 2 and 4 metric tons, a lift range from 1 600 mm to 2 000 mm and a lift table format up to 3 000 x 2 400 mm, we can offer unique possibilities for a large selection of tailor-made solutions for our customers.

At EdmoLift you can find solutions for all your lifting problems.

PRODUCT FEATURES

- Load capacity max 4000 kg.
- Lift table length from 2500 mm to 3000 mm for the standard design.
- Comprehensive accessory program with possibilities for tailor-made customer solutions.
- Complies with European safety standard EN 1570-1 – CE certified.
- 24 V DC control unit and operating device with deadman's switch.
- IP54 approved electrical system.
- Safety spacing between all moving parts.
- Overload protection.
- Adjustable trap prevention safety trip bars on all four sides of the platform.
- Table is equipped with hose burst valves and mechanical locks for service and maintenance.
- Maintenance-free bearing surface.
- PLC control for easy adaptation for particular requirements.
- User manual in 20 different languages.



PRODUCT INFORMATION

Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	Lift time mm/sec	kW	Weight kg pack. incl	Not
TTV 2	36292	2000	1700	302	2500	1600	27	63	3,0	890	
TTV 2B	36293	2000	1700	302	2500	2000	27	63	3,0	1000	
TTV 2LB	36294	2000	1700	302	3000	2000	27	63	3,0	1085	
TTV 2LXB	36295	2000	1700	302	3000	2400	27	63	3,0	1220	
TTV 4	36296	4000	1600	464	2500	1600	37	43	3,0	1300	
TTV 4B	36297	4000	1600	464	2500	2000	37	43	3,0	1525	
TTV 4LB	36298	4000	1600	464	3000	2000	37	43	3,0	1610	
TTV 4LXB	36299	4000	1600	464	3000	2400	37	43	3,0	1765	

CE- or Type 2B declaration

We construct and manufacture our lift tables and lift trolleys in accordance with the basic requirements in the Lift table standards EN 1570-1 and the Lift trolley standards SS-EN ISO 3691-5:2009. We comply with the requirements in accordance with Machine, Low voltage and the EMC directive. The products are delivered after being tested with CE certification and the assurance of agreement or in certain cases the manufacturer's Type 2B declaration.

